


Wall mounted unit

ATXC-D + ARXC-D

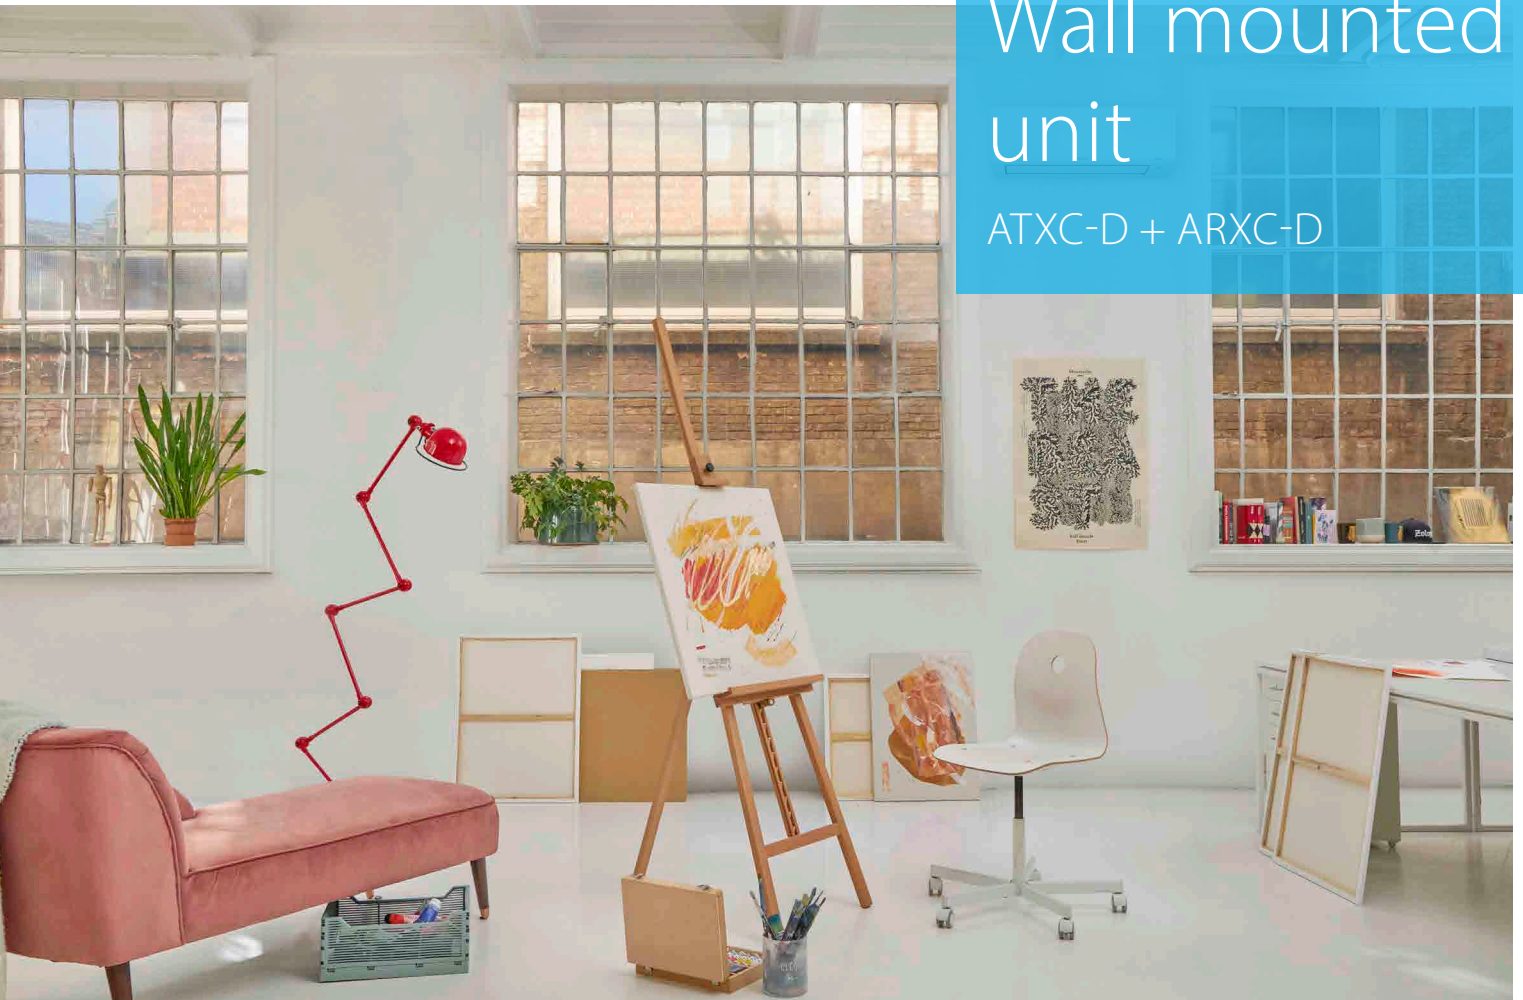

Siesta

DAIKIN



Onecta app (optional)




Energy saving during standby mode

Siesta wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily with any interior décor and is easier to clean
- › Onecta app (optional)
- › Whisper quiet
- › Seasonal efficiency values up to A++ in cooling
- › Bluevolution range: lower environmental impact

ATXC-D + ARXC-D

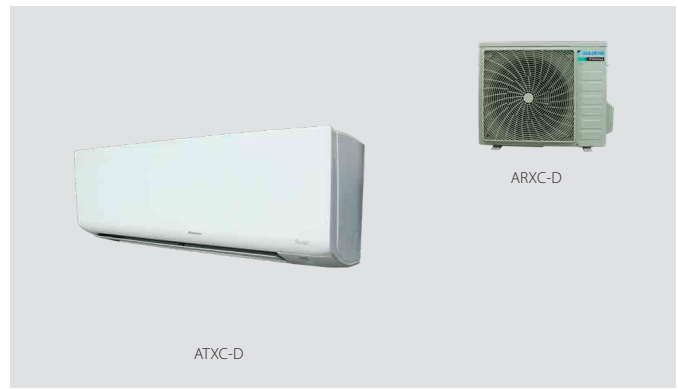

| Indoor unit | | ATXC | 20D | 25D | 35D | 50D | 60D | 71D | |
|----------------------|-------------------------|------------------------------------|----------------------|-----|---------------------|-----|---------------------|-----|------------------------|
| Dimensions | Unit | HeightxWidthxDepth | 288 x770 x234 | | | | 297 x990 x273 | | |
| Weight | Unit | | 9.00 | | 9.50 | | 13.0 | | |
| Air filter | Type | | Removable / washable | | | | | | |
| Fan | Air flow rate | Cooling | 5.4 /6.1 /8.1 /10.8 | | 5.4 /6.4 /8.7 /11.1 | | 7.4 /8.1 /9.9 /12.5 | | 10.2 /12.5 /14.5 /20.4 |
| | | Silent operation/ Low/Medium/ High | | | | | | | |
| Sound power level | Cooling | | 57 | | 58 | | 60 | | 63 |
| Sound pressure level | Cooling | Silent operation/Low/High | 21 /26 /40 | | 22 /26 /41 | | 30 /33 /47 | | 31 /38 /48 |
| Control systems | Infrared remote control | | ARC486A2 | | | | | | |
| | Wired remote control | | - | | | | | | |

| Outdoor unit | | ARXC | 20D | 25D | 35D | 50D | 60D | 71D | |
|----------------------|-------------------------------|--------------------|---------------|-----|--|---------------|----------------|---------------|-------------|
| Dimensions | Unit | HeightxWidthxDepth | 550 x658 x273 | | | 615 x845 x300 | | 695 x930 x350 | |
| Weight | Unit | | 24.0 | | 26.0 | | 39.0 | | 45.0 |
| Sound power level | Cooling | | 58 | | 60 | | 65 | | 66 |
| Sound pressure level | Cooling | High | 45 | | 46 | | 51 | | 54 |
| Operation range | Cooling | Ambient | Min.~Max. | | °CDB | | 10 ~46 | | -15 ~18 |
| | Heating | Ambient | Min.~Max. | | °CWB | | | | |
| Refrigerant | Type | | R-32 | | | | | | |
| | GWP | | 675.0 | | | | | | |
| | Charge | | kg/TCO2Eq | | 0.550 /0.371 | | 0.750 /0.506 | | 1.00 /0.675 |
| Piping connections | Liquid | OD | mm | | 6.35 | | | | |
| | Gas | OD | mm | | 9.52 | | 12.7 | | 30 |
| | Piping length | OU - IU | Max. | | m | | 20 | | 30 |
| | | System | Chargeless | | m | | | | |
| | Additional refrigerant charge | | kg/m | | 0,017 (for piping length exceeding 7.5m) | | | | |
| | Level difference | IU - OU | Max. | | m | | 15.0 | | 20.0 |
| Power supply | Phase/Frequency/Voltage | | Hz/V | | | | 1~/50 /220-240 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | | | | 16 | | |

| Efficiency data | | ATXC + ARXC | 20D + 20D | 25D + 25D | 35D + 35D | 50D + 50D | 60D + 60D | 71D + 71D | |
|--------------------|---------------------------|-----------------|------------|-----------|-------------------|-----------|-------------------|-----------|------------------|
| Cooling capacity | Min./Max. | kW | 1.3 /3.0 | | 1.3 /4.0 | | 1.4 /6.2 | | 1.8 /7.0 |
| Heating capacity | Min./Max. | kW | 1.30 /4.00 | | 1.30 /4.80 | | 1.36 /6.60 | | 1.48 /8.00 |
| Power input | Cooling | Min./Nom./Max. | kW | | 0.30 /0.600 /1.15 | | 0.30 /0.775 /1.15 | | 0.32 /1.06 /1.74 |
| | Heating | Min./Nom./Max. | kW | | 0.28 /0.670 /1.35 | | 0.28 /0.755 /1.35 | | 0.28 /1.08 /1.57 |
| Space cooling | Energy efficiency class | | A++ | | | | | | |
| | Capacity | Pdesign | kW | | 2.08 | | 2.57 | | 3.44 |
| | SEER | | 6.81 | | 6.74 | | 6.78 | | 6.40 |
| | Annual energy consumption | | kWh/a | | 107 | | 134 | | 177 |
| Space heating | Energy efficiency class | | A+ | | | | | | |
| (Average climate) | Capacity | Pdesign | kW | | 1.87 | | 2.23 | | 2.24 |
| | SCOP/A | | 4.39 | | 4.41 | | 4.26 | | 4.37 |
| | Annual energy consumption | | kWh/a | | 597 | | 708 | | 737 |
| Nominal efficiency | EER | | 3.33 | | 3.30 | | 3.25 | | 2.95 |
| | COP | | 3.73 | | 3.76 | | 3.72 | | 3.71 |
| | Energy labeling | Cooling/Heating | A/A | | | | | | |
| | Directive | | C/C | | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | A | 16 | | | | | | |

Daikin Europe Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · <https://www.daikin.eu/> · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN23-054

01/2023



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.