

NATURALUX

A++

WI-FI UPRAVLJANJE

Wi-Fi upravljanje Vam omogućava da, uporabom aplikacije na Vašem pametnom telefonu, kontrolirate funkcije Vašeg klima uređaja. Na bilo kojem mjestu s internetskom mrežom možete odabrati način rada Vašeg uređaja, željenu temperaturu te lako i jednostavno uključiti ili isključiti Vaš uređaj.

Wi-Fi control allows you to control the functions of your air conditioner using an application on your smartphone. At any place with an internet connection, you can choose the operating mode of your device, the desired temperature, and easily and simply turn your device on or off.

I-FEEL FUNKCIJA

Klimatizacijski uređaj je opremljen I-Feel senzorom koji Vam osigurava željenu temperaturu u Vašem okružju. Na upravljaču se nalazi mali senzor koji omogućava da signal dođe do uređaja. Na taj se način pruža najveća udobnost u prostoru u kojem boravite.

The air conditioner is equipped with an I-Feel sensor that provides you with the desired temperature in your environment. There is a small sensor on the steering wheel that allows the signal to reach the device. In this way, the greatest comfort is provided in the space where you are staying.

INTELIGENTNO PREDZAGRIJAVANJE I ODMRZAVANJE

Inteligentno predzagrijavanje i odmrzavanje osiguravaju optimalan rad klima uređaja u svim vremenskim uvjetima.

Intelligent preheating and defrosting ensure optimal operation of the air conditioner in all weather conditions.

Inteligentno predzagrijavanje
Zahvaljujući ovoj funkciji, klima uređaj počinje raditi u načinu grijanja s malom odgodom kako bi prvo zagrijao unutarnji izmjenjivač topline, čime se izbjegava stvaranje neugodnih uvjeta.

Thanks to this function, the air conditioner starts to operate in heating mode with a small delay to heat the indoor heat exchanger first, thus avoiding creating discomfort conditions.

Inteligentno odmrzavanje

Uz inteligentno odmrzavanje klima uređaja, funkcija se aktivira samo kada je to stvarno potrebno kako bi se smanjila potrošnja energije i postigla ugodnija sobna temperatura. *With the intelligent defrost of the air conditioner, the function is activated only when it is really necessary in order to reduce energy consumption and achieve a more comfortable room temperature.*

COLD PLASMA FILTER ZA IONIZIRANJE ZRAKA


Ovaj filter uklanja štetne tvari i alergene iz zraka, čime poboljšava kvalitetu zraka u Vašem prostoru.

This filter removes harmful substances and allergens from the air, which improves the air quality in your space.

SAMODIJAGNOZA

U slučaju bilo kakvih problema ili kvarova, uređaj će automatski identificirati i prikazati odgovarajuću poruku na zaslonu, olakšavajući održavanje i servisiranje uređaja.

In case of any problems or malfunctions, the device will automatically identify and display the corresponding message on the screen, facilitating the maintenance and servicing of the device.

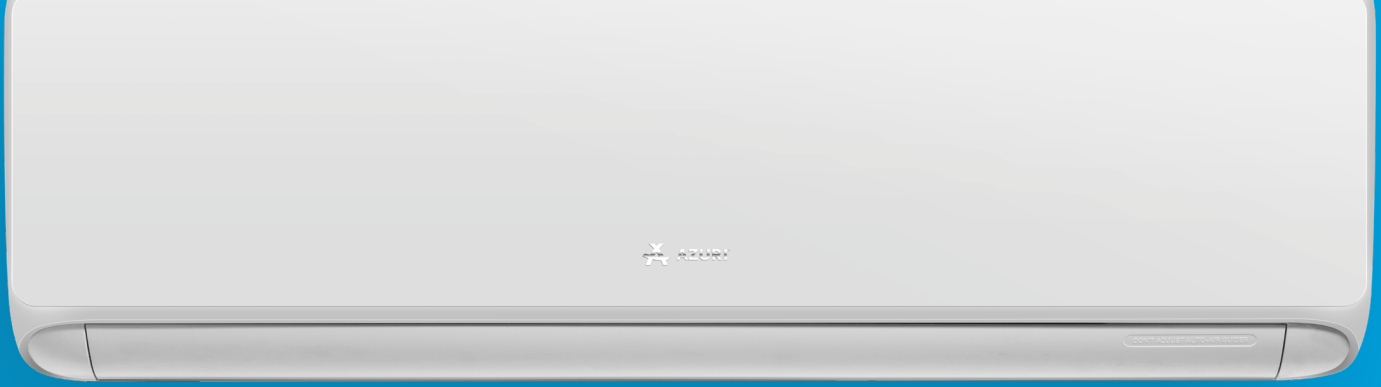

NATURALUX



NATURALUX	AZI-WM25VA/I + AZI-WM25VA/O	AZI-WM35VA/I + AZI-WM35VA/O	AZI-WM50VA/I + AZI-WM50VA/O	AZI-WM70VA/I + AZI-WM70VA/O
Cooling capacity	3,0 kW	3,81 kW	5,6 kW	7,8 kW
Heating capacity	3,0 kW	3,81 kW	5,6 kW	7,8 kW
Absorbed cooling power	680 W	962 W	1501 W	2030 W
Absorbed heating power	680 W	953 W	1393 W	2000 W
Energy class	SEER = 8,4 (A++) / SCOP = 4,5 (A+)	SEER = 7,10 (A++) / SCOP = 4,10 (A+)	SEER = 7,3 (A++) / SCOP = 4,2 (A+)	SEER = 7,0 (A++) / SCOP = 4,2 (A+)
Power supply	1 ph / 220~240 V / 50 Hz	1 ph / 220~240 V / 50 Hz	1 ph / 220~240 V / 50 Hz	1 ph / 220~240 V / 50 Hz
Refrigerant	R32	R32	R32	R32
Sound pressure level - cooling	39/36/34/31/26/24/22 dB(A)	43/39/37/34/31/28/25 dB(A)	47/45/43/41/35/30/28 dB(A)	8/44/41/40/38/37/35 dB(A)
Sound pressure level - heating	39/36/34/31/30/29/27 dB(A)	41/38/36/34/32/29/27 dB(A)	46/44/41/38/37/36/33 dB(A)	50/47/43/41/40/38/36 dB(A)
Sound power level - cooling	58/50/48/45/40/38/36 dB(A)	59/51/49/46/43/40/37 dB(A)	60/58/56/54/48/44/41 dB(A)	64/59/56/55/53/51/48 dB(A)
Sound power level - heating	58/50/48/45/44/43/41 dB(A)	55/52/50/48/46/43/41 dB(A)	60/58/55/52/51/50/47 dB(A)	64/62/58/56/55/51/50 dB(A)
Indoor unit dimension H x W x D (mm)	835 x 275 x 200	835 x 275 x 200	943 x 333 x 246	1078 x 333 x 246
Outdoor unit dimension H x W x D (mm)	732 x 555 x 330	732 x 555 x 330	802 x 555 x 350	958 x 660 x 402
Mass	24,5 kg	25,5 kg	31,5 kg	41,5 kg
Sound pressure level	51 dB (A)	52 dB (A)	56 dB (A)	59 dB (A)
Sound power level	61 dB(A)	63 dB(A)	65 dB(A)	70 dB(A)
Stable cooling range	-15°C do +50°C	-15°C do +50°C	-15°C do +50°C	-15°C do +50°C
Stable heating range	-25°C do +30°C	-25°C do +30°C	-25°C do +30°C	-25°C do +30°C
Max. piping lenght	15 m	15 m	25 m	25 m
Max. piping height	10 m	10 m	10 m	10 m
Outer diameter of liquid pipe	6,35 mm	6,35 mm	6,35 mm	6,35 mm
Outer diameter of gas pipe	9,52 mm	9,52 mm	12,7 mm	15,88 mm
INCLUSIVE:				
Wi-Fi control interface	YES	YES	YES	YES
Wireless remote controller	YES	YES	YES	YES